
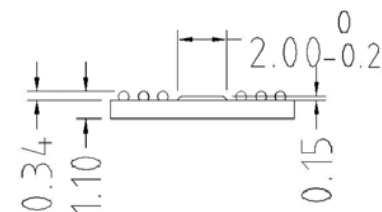
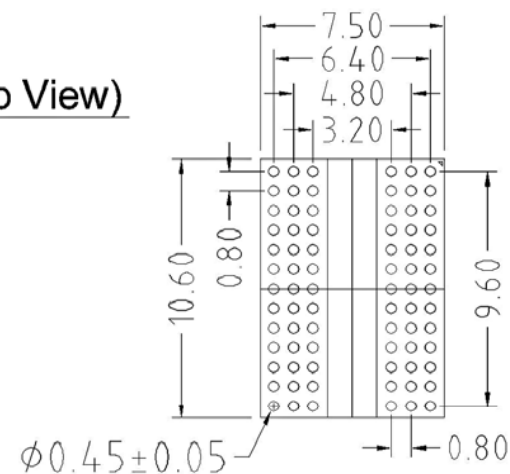



PCB PATTERN (Top View)



1. MATERIAL AND FINISH

- 1. SOCKET BASE :PEI
- 2. CONTACTS :BeCu,SELECTIVE Au-AuFLASH OVER NI PLATING

2. PERFORMANCE

- 1. Insulation Resistance : 1000MΩ or more at DC 100V
- 2. Dielectric Withstanding Voltage: 100V AC for one minute
- 3. Contact Resistance 50mΩ , MAX. at 10mA and 20mV MAX.(Initial)
- 4. Operation Temperature -50°C~+150°C
- 5. Life Span 10,000 Times (Mechanical)
- 6. Operation Force 3.0 Kg MAX

△ C				DWG NO			PART NAME	S-DDR78-0.8-OPU
△ B				MATERIAL		SCALE	1:1	TITLE
△ A				QTY	1	UNIT	mm	
REV	DESCRIPTION	DATE	CHECK	SHEET	1 OF 1	REV	01	
APPLICATION				APPROVE		DATE		
ANGLES	FINISH	ROUGH	ME	0.X:±0.1	CHECK	DATE		
ALL UNSPECIFIED CHAMFERS:0.2				TRIC	0.XX:±0.06	DEGK	DATE	20150204

AIISOCKET
www.allsocket.com
sales@allsocket.com